
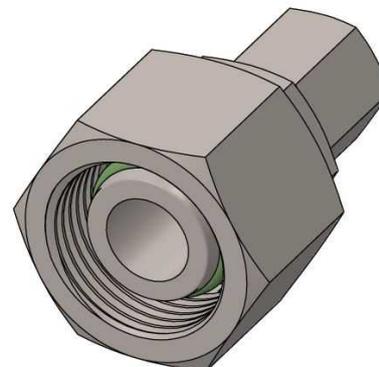


**Raccord union simple femelle tournante Métrique  
(série légère)**

Acier Inoxydable AISI 316-L

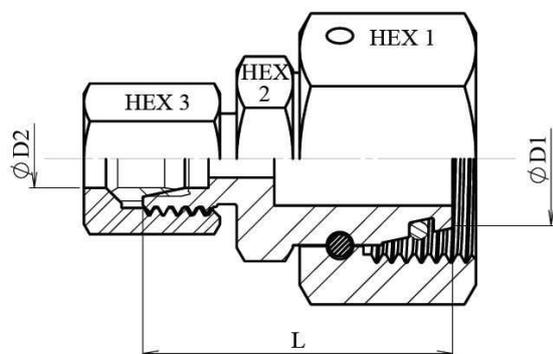

| Référence               | ØD1 | ØD2 | Série | Pression de service (bar) | L    | HEX 1 | HEX 2 | HEX 3 |
|-------------------------|-----|-----|-------|---------------------------|------|-------|-------|-------|
| <b>Z KORL 8-6 TLM</b>   | 8   | 6   | L     | 315                       | 31,7 | 17    | 12    | 14    |
| <b>Z KORL 10-6 TLM</b>  | 10  | 6   | L     | 315                       | 30,5 | 19    | 14    | 14    |
| <b>Z KORL 10-8 TLM</b>  | 10  | 8   | L     | 315                       | 32   | 19    | 14    | 17    |
| <b>Z KORL 12-6 TLM</b>  | 12  | 6   | L     | 315                       | 35   | 22    | 17    | 14    |
| <b>Z KORL 12-8 TLM</b>  | 12  | 8   | L     | 315                       | 35   | 22    | 17    | 17    |
| <b>Z KORL 12-10 TLM</b> | 12  | 10  | L     | 315                       | 33   | 22    | 17    | 19    |
| <b>Z KORL 15-6 TLM</b>  | 15  | 6   | L     | 315                       | 35   | 27    | 19    | 14    |
| <b>Z KORL 15-8 TLM</b>  | 15  | 8   | L     | 315                       | 35   | 27    | 19    | 17    |
| <b>Z KORL 15-10 TLM</b> | 15  | 10  | L     | 315                       | 36   | 27    | 19    | 19    |
| <b>Z KORL 15-12 TLM</b> | 15  | 12  | L     | 315                       | 36   | 27    | 19    | 22    |
| <b>Z KORL 18-8 TLM</b>  | 18  | 8   | L     | 315                       | 41   | 32    | 24    | 17    |
| <b>Z KORL 18-10 TLM</b> | 18  | 10  | L     | 315                       | 42   | 32    | 24    | 19    |
| <b>Z KORL 18-12 TLM</b> | 18  | 12  | L     | 315                       | 42   | 32    | 24    | 22    |
| <b>Z KORL 18-15 TLM</b> | 18  | 15  | L     | 315                       | 43   | 32    | 24    | 27    |
| <b>Z KORL 22-10 TLM</b> | 22  | 10  | L     | 160                       | 42   | 36    | 27    | 19    |
| <b>Z KORL 22-12 TLM</b> | 22  | 12  | L     | 160                       | 42   | 36    | 27    | 22    |
| <b>Z KORL 22-15 TLM</b> | 22  | 15  | L     | 160                       | 43   | 36    | 27    | 27    |
| <b>Z KORL 22-18 TLM</b> | 22  | 18  | L     | 160                       | 43   | 36    | 27    | 32    |
| <b>Z KORL 28-10 TLM</b> | 28  | 10  | L     | 160                       | 45   | 41    | 36    | 19    |
| <b>Z KORL 28-12 TLM</b> | 28  | 12  | L     | 160                       | 41,5 | 41    | 36    | 22    |
| <b>Z KORL 28-15 TLM</b> | 28  | 15  | L     | 160                       | 46   | 41    | 36    | 27    |
| <b>Z KORL 28-18 TLM</b> | 28  | 18  | L     | 160                       | 46   | 41    | 36    | 32    |
| <b>Z KORL 28-22 TLM</b> | 28  | 22  | L     | 160                       | 48   | 41    | 36    | 36    |
| <b>Z KORL 35-12 TLM</b> | 35  | 12  | L     | 160                       | 49,5 | 50    | 46    | 22    |
| <b>Z KORL 35-22 TLM</b> | 35  | 22  | L     | 160                       | 52,5 | 50    | 46    | 36    |
| <b>Z KORL 35-28 TLM</b> | 35  | 28  | L     | 160                       | 52,5 | 50    | 46    | 41    |
| <b>Z KORL 42-22 TLM</b> | 42  | 22  | L     | 160                       | 55,5 | 60    | 50    | 36    |

Raccords à bague DIN 2353

Raccords union Métrique

## Raccord union simple femelle tournante Métrique (série légère)

Acier Inoxydable AISI 316-L



2/2

| Référence               | ØD1 | ØD2 | Série | Pression de service (bar) | L    | HEX 1 | HEX 2 | HEX 3 |
|-------------------------|-----|-----|-------|---------------------------|------|-------|-------|-------|
| <b>Z KORL 42-28 TLM</b> | 42  | 28  | L     | 160                       | 55,3 | 60    | 50    | 41    |
| <b>Z KORL 42-35 TLM</b> | 42  | 35  | L     | 160                       | 57,3 | 60    | 50    | 50    |

MATÉRIAU DU JOINT FKM