
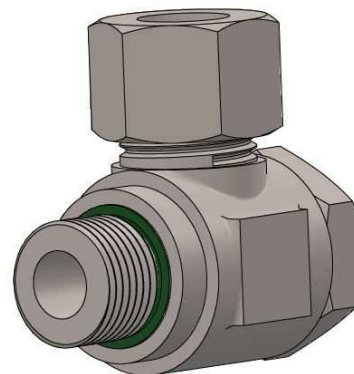


Raccordo orientabile 90° ad occhio Metrico con guarnizione

Acciaio Inossidabile AISI 316-L

1/1

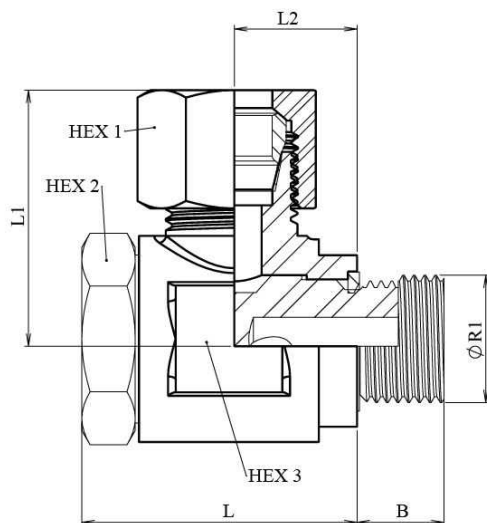

Codice	TUBO	SERIE	LETTURA	PRESSIONE DI LAVORO (bar)	LONGITUDINE TOTAL	LONGITUDINE L1	LONGITUDINE L2	ESAGONO 1	ESAGONO 2	ESAGONO 3	B
Z WSVL 6 M 10X1	6	L	M10X1	315	24	27	10,5	14	17	17	8
Z WSVL 8 M 12X1,5	8	L	M12X1.5	315	24	29,5	14	17	19	22	12
Z WSVL 10 M 14X1,5	10	L	M14X1.5	315	24	27	10,5	14	17	17	8
Z WSVL 12 M 16X1,5	12	L	M16X1.5	315	47	29,5	14	22	24	27	10
Z WSVL 15 M 18X1,5	15	L	M18X1.5	315	46,5	41	41	27	27	32	12
Z WSVL 18 M 22X1,5	18	L	M22X1.5	315	38,5	33	16,5	22	24	27	12
Z WSVL 35 M 42X2	35	L	M42X2	160	54	43	24	36	36	41	16
Z WSVS 6 M 12X1,5	6	S	M12X1.5	630	32	31,5	14	17	19	22	12
Z WSVS 8 M 14X1,5	8	S	M14X1.5	630	32	31,5	14	19	19	22	12
Z WSVS 10 M 16X1,5	10	S	M16X1.5	630	38,5	35	16,5	22	24	27	12
Z WSVS 12 M 18X1,5	12	S	M18X1.5	630	38,5	35	16,5	24	24	27	12
Z WSVS 14 M 20X1,5	14	S	M20X1.5	630	46,5	41	21,5	27	30	32	14
Z WSVS 16 M 22X1,5	16	S	M22X1.5	400	46,5	41	21,5	30	30	32	14
Z WSVS 20 M 27X2	20	S	M27X2	400	54	47	24	36	36	41	16
Z WSVS 30 M 42X2	30	S	M42X2	400	80	62,5	35,5	50	55	60	20

MATERIALE TENUTA FKM