


Válvula antirretorno tubo-rosca BSP

Acero Inoxidable AISI 316-L

1/1

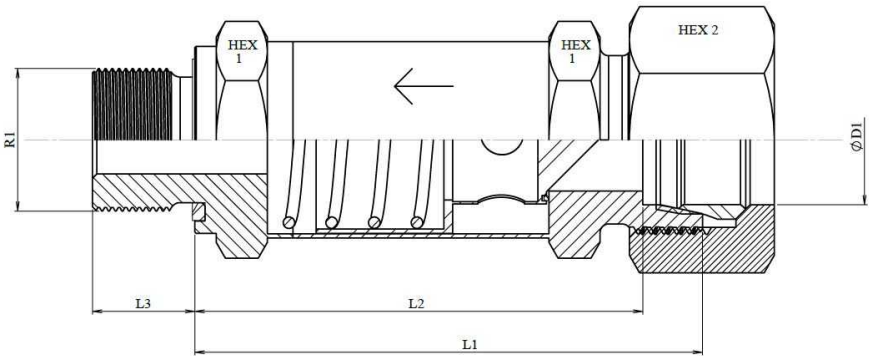

Presión de apertura: 1 bar

Temperatura Max: 200° C

Junta FKM

Temperatura de trabajo: -20°C a +120°C

Artículo	ØD1	Serie	R1	Presión trabajo (bar)	L1	L2	L3	HEX 1	HEX 2
Z RHZL 6 R 1/8	6	L	1/8" BSP	315	33,5	26,5	8	17	17
Z RHZL 8 R 1/4	8	L	1/4" BSP	315	35,5	28,5	12	19	19
Z RHZL 10 R 1/4	10	L	1/4" BSP	315	45,5	38,5	12	22	24
Z RHZL 12 R 3/8	12	L	3/8" BSP	315	47,5	40,5	12	27	30
Z RHZL 15 R 1/2	15	L	1/2" BSP	315	49,5	42,5	14	27	32
Z RHZL 18 R 1/2	18	L	1/2" BSP	315	55,5	48	14	36	36
Z RHZL 22 R 3/4	22	L	3/4" BSP	160	63,5	56	16	41	46
Z RHZL 28 R 1	28	L	1" BSP	160	71,5	64	18	50	55
Z RHZL 35 R 1 1/4	35	L	1"1/4 BSP	160	80,5	70	20	60	60
Z RHZL 42 R 1 1/2	42	L	1"1/2 BSP	160	81,5	70,5	22	65	70
Z RHZS 6 R 1/4	6	S	1/4" BSP	630	38,5	31,5	12	17	19
Z RHZS 8 R 1/4	8	S	1/4" BSP	630	38,5	31,5	12	17	19
Z RHZS 10 R 3/8	10	S	3/8" BSP	630	45,5	38	12	22	24
Z RHZS 12 R 3/8	12	S	3/8" BSP	630	48,5	41	12	24	27
Z RHZS 14 R 1/2	14	S	1/2" BSP	630	51,5	43,5	14	27	32
Z RHZS 16 R 1/2	16	S	1/2" BSP	400	54,5	46	14	32	36
Z RHZS 20 R 3/4	20	S	3/4" BSP	400	60,5	50	16	38	41
Z RHZS 25 R 1	25	S	1" BSP	400	66,5	54,5	18	46	50
Z RHZS 30 R 1 1/4	30	S	1"1/4 BSP	400	77,5	64	20	55	60
Z RHZS 38 R 1 1/2	38	S	1"1/2 BSP	315	87,5	71,5	22	65	70