


Codo 45° regulable macho - macho JIC 37°

Acero Inoxidable AISI 316-L

1/1

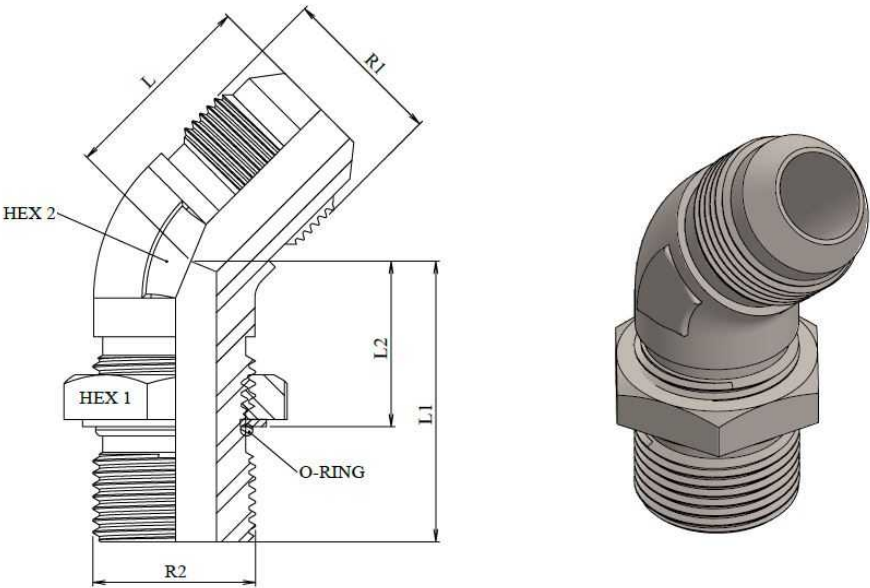

| Artículo       | ØD1      | ØD2   | R1               | R2               | L    | L1   | L2   | HEX 1 | HEX 2 |
|----------------|----------|-------|------------------|------------------|------|------|------|-------|-------|
| <b>ZS77506</b> | 6        | 1/4"  | 7/16" - 20h UNF  | 7/16" - 20h UNF  | 18,5 | 26,5 | 17   | 14    | 15    |
| <b>ZS77508</b> | 8        | 5/16" | 1/2" - 20h UNF   | 1/2" - 20h UNF   | 19,5 | 26,5 | 17   | 17    | 15    |
| <b>ZS77510</b> | 10       | 3/8"  | 9/16" - 18h UNF  | 9/16" - 18h UNF  | 21   | 29   | 17,5 | 17    | 15    |
| <b>ZS77512</b> | 12       | 1/2"  | 3/4" - 16h UNF   | 3/4" - 16h UNF   | 25   | 33   | 20,5 | 22    | 19    |
| <b>ZS77516</b> | 14-15-16 | 5/8"  | 7/8" - 14h UNF   | 7/8" - 14h UNF   | 28   | 38,5 | 24,5 | 27    | 22    |
| <b>ZS77520</b> | 18-20    | 3/4"  | 1" 1/16 - 12h UN | 1" 1/16 - 12h UN | 32,5 | 44   | 27,5 | 32    | 27    |