


Gerade Einschraubverschr. zyl. UNF-X

Edelstahl AISI 316-L

1/1

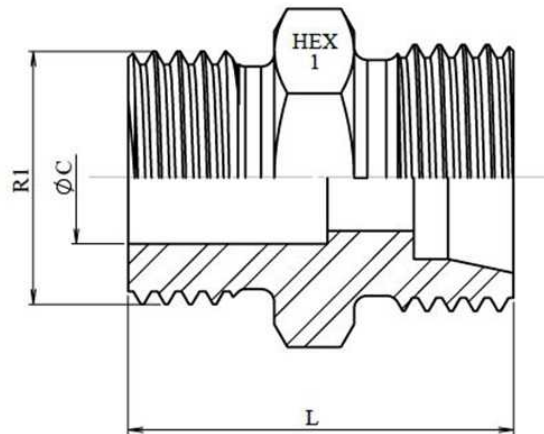

Artikel	ØD1	Reihe	R1	Betriebs- Druck (bar)	L	HEX 1	ØC
Z STA AL 8 7/16 UNF	8	L	7/16 UNF	630	25	14	4
Z STA AL 10 7/16 UNF	10	L	7/16 UNF	315	26	17	4
Z STA AL 12 9/16 UNF	12	L	9/16 UNF	315	27	19	7,5
Z STA AL 12 3/4 UNF	12	L	3/4 UNF	315	28	22	10
Z STA AL 15 3/4 UNF	15	L	3/4 UNF	315	29	24	12
Z STA AL 18 7/8 UNF	18	L	7/8 UNF	315	31,5	27	15
Z STA AL 22 1 1/16 UNF	22	L	1 1/16 UNF	160	36	32	18
Z STA AL 28 1 5/16 UNF	28	L	1 5/16 UNF	160	37,5	41	22
Z STA AL 35 1 5/8 UNF	35	L	1 5/8 UNF	160	40	50	30
Z STA AS 8 7/16 UNF	8	S	7/16 UNF	630	27	17	4
Z STA AS 10 9/16 UNF	10	S	9/16 UNF	630	28	19	7,5
Z STA AS 12 9/16 UNF	12	S	9/16 UNF	630	31	22	8
Z STA AS 16 3/4 UNF	16	S	3/4 UNF	400	32	27	9,9
Z STA AS 20 7/8 UNF	20	S	7/8 UNF	400	40,5	32	15
Z STA AS 20 1 1/16 UNF	20	S	1 1/16 UNF	400	34	32	9,9
Z STA AS 25 1 5/16 UNF	25	S	1 5/16 UNF	400	47,5	41	22
Z STA AS 30 1 5/16 UNF	30	S	1 5/16 UNF	400	52,5	46	22
Z STA AS 38 1 5/8 UNF	38	S	1 5/8 UNF	315	54,5	55	32