
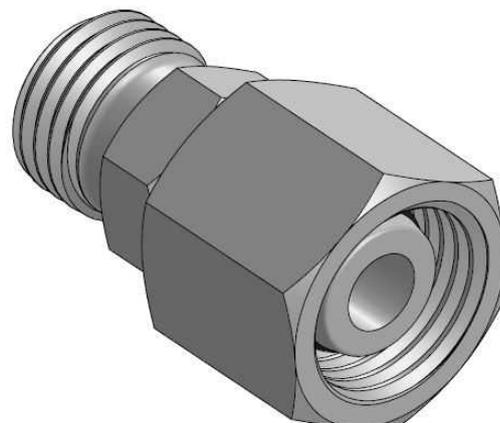


Raccord union simple femelle tournante Métrique nu (série légère)

Acier Inoxydable AISI 316-L

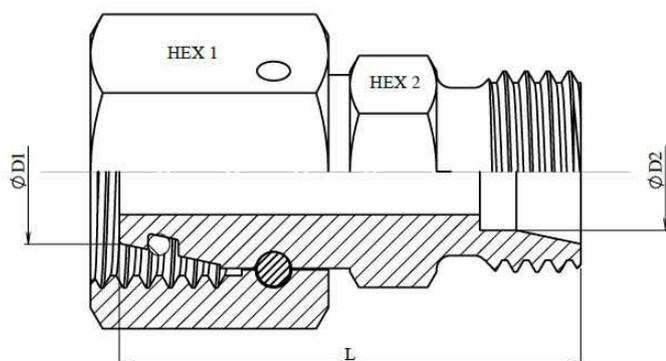

| Référence | ØD1 | ØD2 | Pression de service (bar) | Série | L | HEX 1 | HEX 2 |
|----------------------|-----|-----|---------------------------|-------|------|-------|-------|
| Z STA KORL 8-6 TLM | 8 | 6 | 315 | L | 31 | 12 | 12 |
| Z STA KORL 10-6 TLM | 10 | 6 | 315 | L | 31.7 | 12 | 12 |
| Z STA KORL 10-8 TLM | 10 | 8 | 315 | L | 32 | 12 | 14 |
| Z STA KORL 12-6 TLM | 12 | 6 | 315 | L | 35 | 22 | 17 |
| Z STA KORL 12-8 TLM | 12 | 8 | 315 | L | 35 | 22 | 17 |
| Z STA KORL 12-10 TLM | 12 | 10 | 315 | L | 36 | 22 | 17 |
| Z STA KORL 15-6 TLM | 15 | 6 | 315 | L | 35 | 27 | 19 |
| Z STA KORL 15-8 TLM | 15 | 8 | 315 | L | 35 | 27 | 19 |
| Z STA KORL 15-10 TLM | 15 | 10 | 315 | L | 36 | 27 | 19 |
| Z STA KORL 18-8 TLM | 18 | 8 | 315 | L | 41 | 32 | 24 |
| Z STA KORL 18-10 TLM | 18 | 10 | 315 | L | 42 | 32 | 24 |
| Z STA KORL 18-12 TLM | 18 | 12 | 315 | L | 42 | 32 | 24 |
| Z STA KORL 18-15 TLM | 18 | 15 | 315 | L | 43 | 32 | 24 |
| Z STA KORL 22-10 TLM | 22 | 10 | 160 | L | 42 | 36 | 27 |
| Z STA KORL 22-12 TLM | 22 | 12 | 160 | L | 42 | 36 | 27 |
| Z STA KORL 22-15 TLM | 22 | 15 | 160 | L | 43 | 36 | 27 |
| Z STA KORL 22-18 TLM | 22 | 18 | 160 | L | 43 | 36 | 27 |
| Z STA KORL 28-10 TLM | 28 | 10 | 160 | L | 45 | 41 | 36 |
| Z STA KORL 28-12 TLM | 28 | 12 | 160 | L | 45 | 41 | 36 |
| Z STA KORL 28-15 TLM | 28 | 15 | 160 | L | 46 | 41 | 36 |
| Z STA KORL 28-18 TLM | 28 | 18 | 160 | L | 46 | 41 | 36 |
| Z STA KORL 28-22 TLM | 28 | 22 | 160 | L | 48 | 41 | 36 |
| Z STA KORL 35-12 TLM | 35 | 12 | 160 | L | 50,5 | 50 | 46 |
| Z STA KORL 35-22 TLM | 35 | 22 | 160 | L | 52,5 | 50 | 46 |
| Z STA KORL 35-28 TLM | 35 | 28 | 160 | L | 52,5 | 50 | 46 |
| Z STA KORL 42-22 TLM | 42 | 22 | 160 | L | 57,3 | 60 | 50 |
| Z STA KORL 42-28 TLM | 42 | 28 | 160 | L | 55.3 | 60 | 50 |

Raccords DIN 2353 inox sans bagues et écrous

Raccords union Métrique nus

Raccord union simple femelle tournante Métrique nu (série légère)

Acier Inoxydable AISI 316-L



2/2

| Référence | ØD1 | ØD2 | Pression de service (bar) | Série | L | HEX 1 | HEX 2 |
|----------------------|-----|-----|---------------------------|-------|------|-------|-------|
| Z STA KORL 42-35 TLM | 42 | 35 | 160 | L | 52,5 | 60 | 50 |