
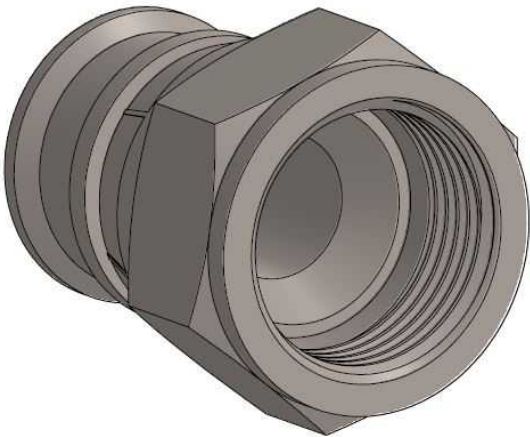


Hembra giratoria prensada soldable JIC 37° con guía

Acero Inoxidable AISI 316-L

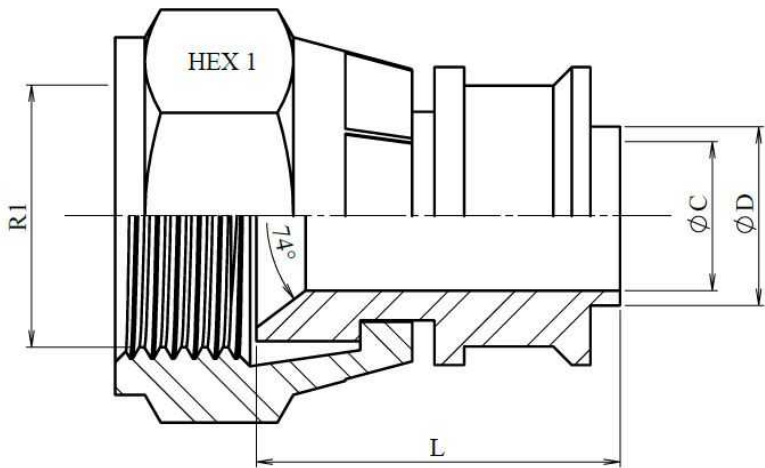

Artículo	DN	R1	L	HEX 1	ØC	ØD
Z12830704	1/4"	7/16" 20h UNF	21	14	4	5,8
Z12830804	1/4"	1/2" 20h UNF	22,5	17	4	5,8
Z12830906	3/8"	9/16" 18h UNF	22,5	19	6	9,8
Z12831206	3/8"	3/4" 16h UNF	24,5	24	8	9,8
Z12831208	1/2"	3/4" 16h UNF	24,5	24	10	12
Z12831408	1/2"	7/8" 14h UNF	25	27	10	12
Z12831410	5/8"	7/8" 14h UNF				
Z12831712	3/4"	1"1/16 12h UN	27	32	15	19
Z12832116	1"	1"5/16 12h UN	30	41	22	24,5
Z12832620	1"1/4	1"5/8 12h UN	34	50	26	32
Z12833024	1"1/2	1"7/8 12h UN	37,5	55	33,5	39