


Femelle tournante à souder 45° JIC 37°

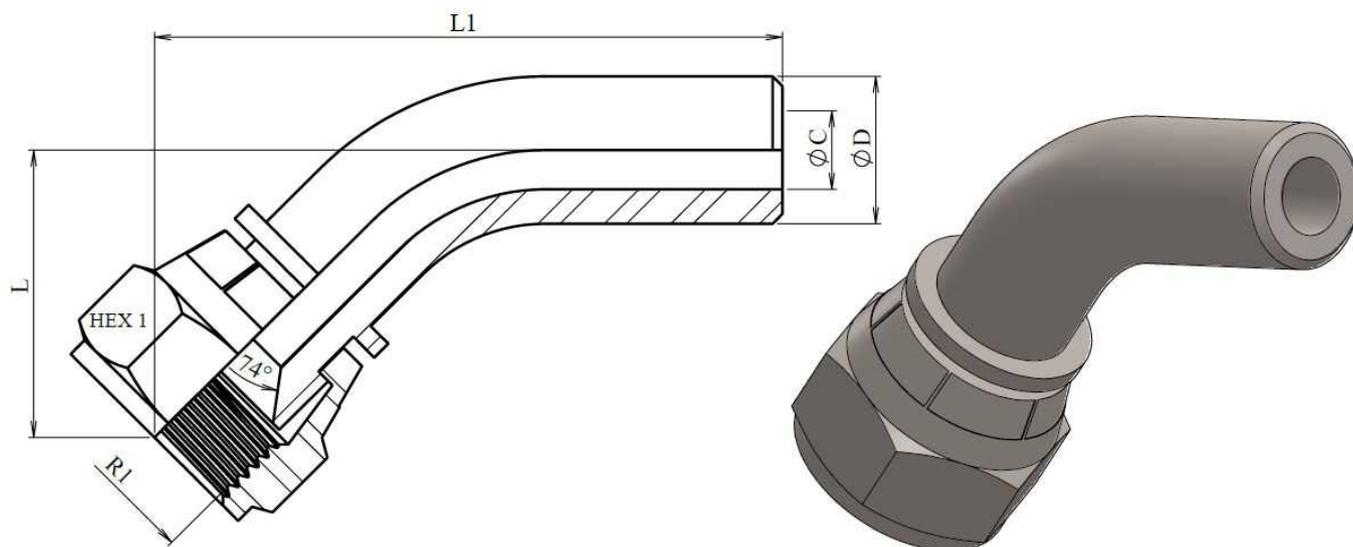

Référence	DN	R1	L	L1	ØC	ØD	HEX 1
Z10420704	1/4"	7/16" 20h UNF	14	33	4	8	14
Z10420804	1/4"	1/2" 20h UNF	15	34	4	8	17
Z10420906	3/8"	9/16" 18h UNF	18	44,5	6	12	19
Z10421208	1/2"	3/4" 16h UNF	23	57	8	12	24
Z10421408	1/2"	7/8" 14h UNF	23	57	8	15	27
Z10421712	3/4"	1"1/16 12h UN	29	72	15	22	32
Z10422116	1"	1"5/16 12h UN	34	93	19	31	41
Z10422620	1"1/4	1"5/8 12h UN	42	106	25	39	50
Z10423024	1"1/2	1"7/8 12h UN	43	126	32	44	55