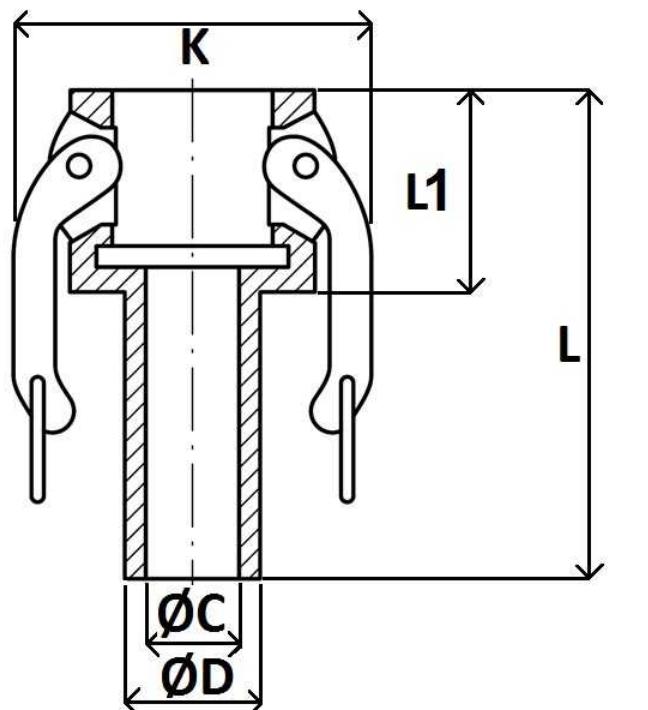


Autolock hembra - para manguera Tipo C

Acero Inoxidable AISI 316

1/1

**AUTOLOCK
SYSTEM**

Normas: Roscas machos de acuerdo a EN10226-1
Roscas hembras de acuerdo a ISO 228-1

PN: 1/2 " - 4" 150 PSI ----- 5 " - 6" 75 PSI

Artículo	DN	R1	L	L1	ØC	ØD	K
ZC012S	12	1/2"	69	28	85	14	46
ZC020S	20	3/4"	80	50	14,7	20,4	62,8
ZC025S	25	1"	94	38,2	20,6	26,5	62,8
ZC032S	32	1"1/4	106	44	27,5	33	78,5
ZC040S	40	1"1/2	107	44	34	40	80
ZC050S	50	2"	126	48,3	45	53	96
ZC065S	65	2"1/2	122	52,2	53	66	104
ZC080S	80	3"	152	53,4	66	78	130
ZC100S	100	4"	175	62	92	103	158

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.
Junta NBR