


Autolock femmina con inserto per tubo - TIPO C

Acciao Inossidabile AISI 316

1/1

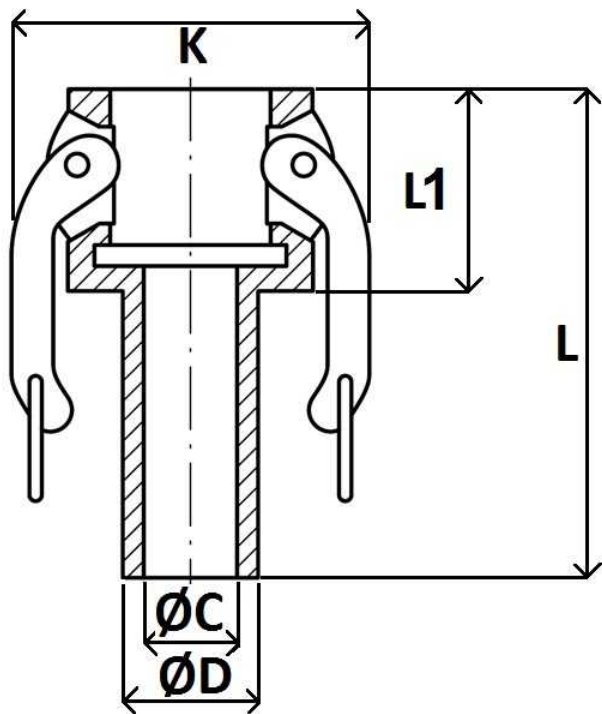

AUTOLOCK
SYSTEM



Norms: Male thread according to EN10226-1
Female thread according to ISO 228-1
PN: 1/2 "- 4" 150 PSI ----- 5 "- 6" 75 PSI

Codice	DN	R1	L	L1	ØC	ØD	K
ZC012S	12	1/2"	69	28	85	14	46
ZC020S	20	3/4"	80	50	14,7	20,4	62,8
ZC025S	25	1"	94	38,2	20,6	26,5	62,8
ZC032S	32	1"1/4	106	44	27,5	33	78,5
ZC040S	40	1"1/2	107	44	34	40	80
ZC050S	50	2"	126	48,3	45	53	96
ZC065S	65	2"1/2	122	52,2	53	66	104
ZC080S	80	3"	152	53,4	66	78	130
ZC100S	100	4"	175	62	92	103	158

Le dimensioni delle parti in microfusione sono approssimate in quegli elementi senza meccanizzazione.
Guarnizione NBR