



Reducer adaptor male BSP 60° - fixed female BSP

Stainless Steel AISI 316-L 1/1

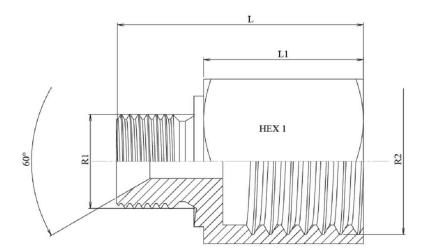



Part nº	R1	R2	L	L1	HEX 1	øс
Z10600204	1/8" BSP	1/4" BSP	30	21	19	3,5
Z10600206	1/8" BSP	3/8" BSP	26	17	22	3,5
Z10600402	1/4" BSP	1/8" BSP	31	18	17	6
Z10600406	1/4" BSP	3/8" BSP	31	18	22	6
Z10600408	1/4" BSP	1/2" BSP	38	25	27	6
Z10600604	3/8" BSP	1/4" BSP	35	21	22	8
Z10600608	3/8" BSP	1/2" BSP	39	25	27	8
Z10600804	1/2" BSP	1/4" BSP	38,5	21	27	11
Z10600806	1/2" BSP	3/8"BSP	39,5	22	27	11
Z10600812	1/2" BSP	3/4" BSP	44	26,5	32	11
Z10600816	1/2" BSP	1" BSP	45,5	28,5	41	11
Z10601206	3/4" BSP	3/8" BSP	35,5	17	32	15
Z10601208	3/4" BSP	1/2" BSP	40,5	22	32	16
Z10601216	3/4" BSP	1" BSP	47	28,5	41	16
Z10601612	1" BSP	3/4" BSP	48	26,5	41	22
Z10601620	1" BSP	1"1/4 BSP	53,5	32	50	22
Z10601624	1" BSP	1"1/2 BSP	59,5	40	55	22,2
Z10602016	1"1/4 BSP	1" BSP	53,5	28,5	50	30
Z10602420	1"1/2 BSP	1"1/4 BSP	59	32	55	33
Z10602432	1"1/2 BSP	2" BSP	68	40	70	33
Z10603224	2" BSP	1"1/2 BSP	68	40	70	46

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Printed on: 30/08/2025 at 14:13