
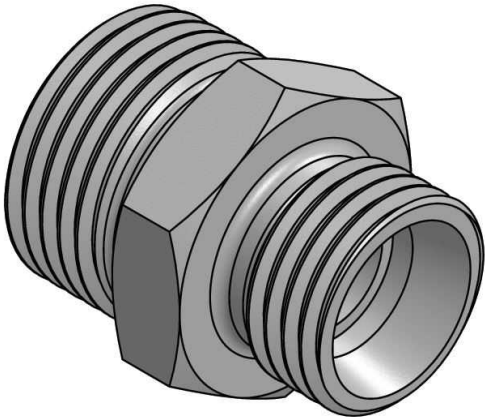


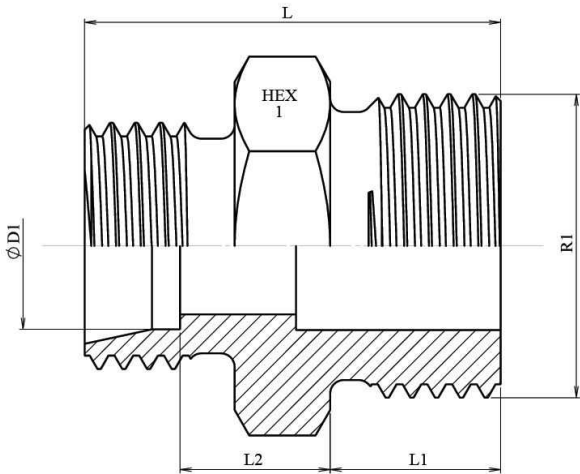

| Artículo             | ØD1 | Serie | R1         | Presión trabajo (bar) | L    | L1   | L2   | HEX 1 |
|----------------------|-----|-------|------------|-----------------------|------|------|------|-------|
| STA AL 8 7/16 UNF    | 8   | L     | 7/16 UNF   | 315                   | 27   | 9    | 11   | 17    |
| STA AL 10 7/16 UNF   | 10  | L     | 7/16 UNF   | 315                   | 28   | 9    | 12   | 17    |
| STA AL 12 3/4 UNF    | 12  | L     | 3/4 UNF    | 315                   | 31,5 | 11   | 13,5 | 24    |
| STA AL 12 7/8 UNF    | 12  | L     | 7/8 UNF    | 315                   | 34   | 12,7 | 14,3 | 27    |
| STA AL 12 9/16 UNF   | 12  | L     | 9/16 UNF   | 315                   | 29   | 10   | 12   | 19    |
| STA AL 15 3/4 UNF    | 15  | L     | 3/4 UNF    | 315                   | 32,5 | 11   | 14,5 | 24    |
| STA AL 18 3/4 UNF    | 18  | L     | 3/4 UNF    | 315                   | 33   | 11   | 15   | 27    |
| STA AL 18 7/8 UNF    | 18  | L     | 7/8 UNF    | 315                   | 35   | 12,7 | 14,8 | 27    |
| STA AL 22 1 1/16 UNF | 22  | L     | 1 1/16 UNF | 160                   | 39,5 | 15   | 17   | 32    |
| STA AL 22 1 5/16 UNF | 22  | L     | 1 5/16 UNF | 160                   | 41   | 15   | 18   | 41    |
| STA AL 22 7/8 UNF    | 22  | L     | 7/8 UNF    | 160                   | 37   | 12,7 | 16,8 | 32    |
| STA AL 28 1 1/16 UNF | 28  | L     | 1 1/16 UNF | 160                   | 40   | 15   | 17,5 | 41    |
| STA AL 28 1 5/16 UNF | 28  | L     | 1 5/16 UNF | 160                   | 41   | 15   | 18   | 41    |
| STA AL 35 1 5/16 UNF | 35  | L     | 1 5/16 UNF | 160                   | 44   | 15   | 18   | 46    |
| STA AL 35 1 5/8 UNF  | 35  | L     | 1 5/8 UNF  | 160                   | 44   | 15   | 18   | 50    |
| STA AL 42 1 5/8 UNF  | 42  | L     | 1 5/8 UNF  | 160                   | 46   | 15   | 19,5 | 55    |
| STA AS 8 7/16 UNF    | 8   | S     | 7/16 UNF   | 630                   | 31   | 11   | 13   | 17    |
| STA AS 10 9/16 UNF   | 10  | S     | 9/16 UNF   | 630                   | 32   | 12   | 12,5 | 19    |
| STA AS 12 3/4 UNF    | 12  | S     | 3/4 UNF    | 630                   | 36   | 14   | 14,5 | 24    |
| STA AS 12 9/16 UNF   | 12  | S     | 9/16 UNF   | 630                   | 32,5 | 12   | 13   | 22    |
| STA AS 16 3/4 UNF    | 16  | S     | 3/4 UNF    | 400                   | 38   | 14   | 15,5 | 24    |
| STA AS 20 1 1/16 UNF | 20  | S     | 1 1/16 UNF | 400                   | 46   | 18,5 | 17   | 32    |
| STA AS 20 3/4 UNF    | 20  | S     | 3/4 UNF    | 400                   | 42   | 14   | 17,5 | 32    |
| STA AS 20 7/8 UNF    | 20  | S     | 7/8 UNF    | 400                   | 44   | 16   | 17,5 | 32    |
| STA AS 25 1 5/16 UNF | 25  | S     | 1 5/16 UNF | 400                   | 50   | 18,5 | 19,5 | 41    |
| STA AS 30 1 5/16 UNF | 30  | S     | 1 5/16 UNF | 400                   | 52   | 18,5 | 20   | 46    |

| Artículo | ØD1 | Serie | R1 | Presión<br>trabajo<br>(bar) | L | L1 | L2 | HEX 1 |
|----------|-----|-------|----|-----------------------------|---|----|----|-------|
|----------|-----|-------|----|-----------------------------|---|----|----|-------|

Se pueden entregar con junta.