
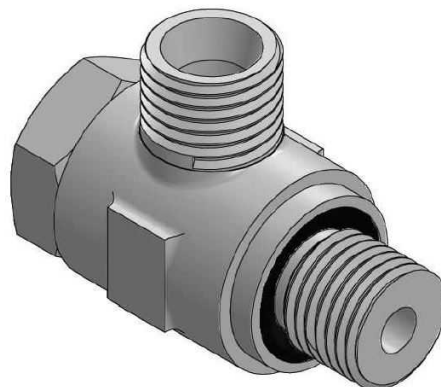


Banjos only body

Banjo coupling with captive seal and o'ring Metric cylindrical only body

Stainless Steel AISI 316-L

1/1

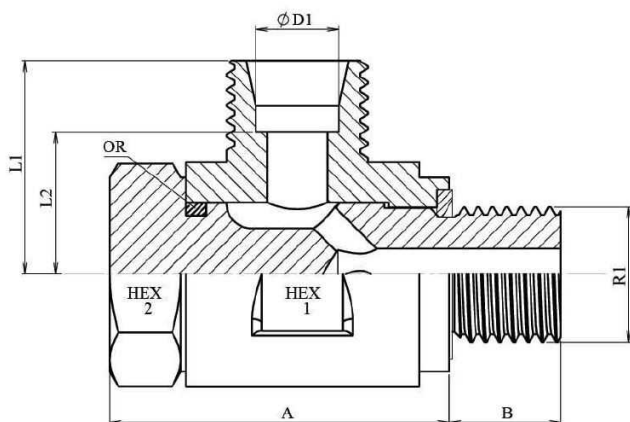

Part n°	ØD1	Serie	R1	Working Pressure (bar)	L	L1	HEX 1	HEX 2	A	B
Z STA WSVL 6 M 10X1	6	L	M10X1	315	19	13,5	17	17	23,5	8
Z STA WSVL 8 M 12X1,5	8	L	M12X1.5	315	21,5	14,5	22	19	29	12
Z STA WSVL 10 M 14X1,5	10	L	M14X1.5	315	22,5	15,5	22	19	30	12
Z STA WSVL 12 M 16X1,5	12	L	M16X1.5	315	25	18	27	24	35	12
Z STA WSVL 15 M 18X1,5	15	L	M18X1.5	315	28,5	21,5	32	27	46	12
Z STA WSVL 18 M 22X1,5	18	L	M22X1.5	315	28,5	21	32	27	46	14
Z STA WSVL 22 M 26X1,5	22	L	M26X1.5	160	35	27,5	41	36	52	16
Z STA WSVL 28 M 33X2	28	L	M33X2	160	39,5	32	50	46	64	18
Z STA WSVL 35 M 42X2	35	L	M42X2	160	46,5	36	60	50	75	20
Z STA WSVL 42 M 48X2	42	L	M48X2	160	51,5	40,5	70	60	88	22
Z STA WSVS 6 M 12X1,5	6	S	M12X1.5	630	23,5	16,5	19	22	30	12
Z STA WSVS 8 M 14X1,5	8	S	M14X1.5	630	23,5	16,5	19	22	30	12
Z STA WSVS 10 M 16X1,5	10	S	M16X1.5	630	26	18,5	27	24	35	12
Z STA WSVS 12 M 18X1,5	12	S	M18X1.5	630	26	18,5	27	24	35	12
Z STA WSVS 14 M 20X1,5	14	S	M20X1.5	630	30,5	22,5	30	27	46	14
Z STA WSVS 16 M 22X1,5	16	S	M22X1.5	400	30,5	22	30	27	46	14
Z STA WSVS 20 M 27X2	20	S	M27X2	400	37	26,5	41	36	52	16
Z STA WSVS 30 M 42X2	30	S	M42X2	400	50,5	37	60	50	75	20
Z STA WSVS 38 M 48X2	38	S	M48x2	315	57,5	41,5	70	60	88	22